



D453

50.000 - 250.000 l/h

Suitable for

Agressive low viscosity acids and alkalines

Typical applications

Chemical, environmental and process industry


Features

- Long life, heavy duty construction
- No bearings
- Sealless
- Can run dry
- Viton O-rings
- Max. temperature 80°C
- Discharge flange DIN2501 - PN10
- Threaded NPT connection for suction extension or strainer
- Electric motor ABB IEC IM B5, 4-P, IP55, 400/690V incl. 3 PTC thermistors

Options

- EPDM O-rings
- Horizontal discharge pipe
- Suction extension pipe <1500mm
- Suction strainer
- Customized mounting plate
- Pump-tank gasket
- Motor drip cover
- Customized motor colour
- Special motorflange for American market

Vertical pumps series D400 - PP

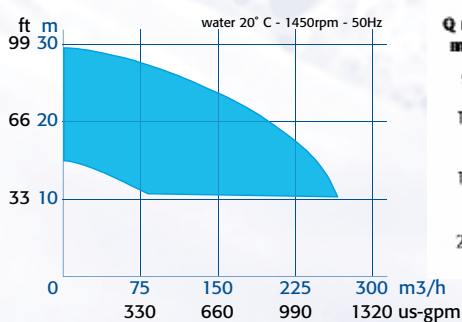

Q max m3/h	H max m	Type	Motor kW	Motor HP	Immersion length (mm)	In DN(mm)	Out DN(mm)	Weight kg
90	18	D453	7,5	10	550	100	100	115
150	18	D455	11	15	550	125	100	185
		D456	15	20	550	125	100	210
130	30	D465	11	15	550	80	100	210
		D466	15	20	550	80	100	230
260	29	D467	18,5	25	650	125	125	293
		D468	22	30	650	125	125	300
		D469	30	40	650	125	125	364

 www.hendor.com

