

**1,000 - 10,000 l/h**

**主要应用范围**


电镀 - 冲洗 - 过滤

**特点**


- 浸入深度  
D90 270mm / D120 400mm
- 符合环保要求的槽内安装
- 通长转轴 - 密封
- 自吸式 - 可脱水运转
- 标准长度电机轴
- 出口承插有聚丙烯 (PP)、聚偏二氟乙烯 (PVDF) 和氯化聚氯乙烯 (CPVC) 材料

**选项**


- 延伸吸管
- 软管连接

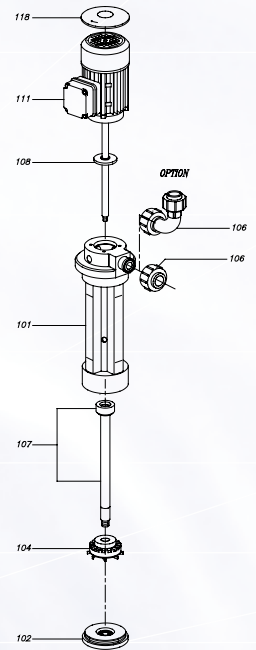

**立式泵系列 D90 / D120 - PP/PVDF**

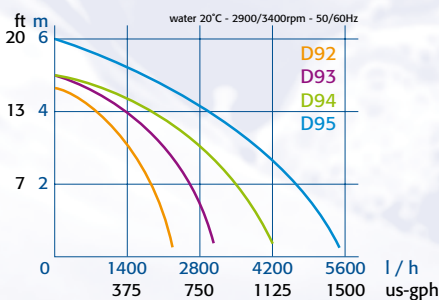

Type	Material	kW	HP	Out(d/DN)
D92	PP/PVDF	0,12	1/6	25/20
D93	PP/PVDF	0,18	1/4	25/20
D94	PP/PVDF	0,25	1/3	25/20
D95	PP/PVDF	0,37	1/2	25/20

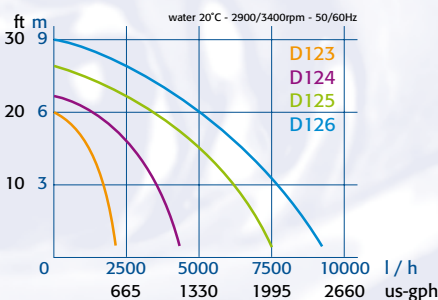

Type	Material	kW	HP	Out(d/DN)
D123	PP/PVDF	0,18	1/4	32/25
D124	PP/PVDF	0,25	1/3	32/25
D125	PP/PVDF	0,37	1/2	32/25
D126	PP/PVDF	0,55	3/4	32/25

**i** [www.hendor.com](http://www.hendor.com)

