**New Premium Efficiency**

hendor
Quality Pumps & Filters

D13-12-300-PP

## 2.000 - 12.000 l/h

**Typical applications**
Plating - Rinsing - Filtration
Waste treatment

**Features**
- Immersion length 300mm
- Environmentally safe in-tank installation
- Free turning shaft - no seal
- Self priming - can run dry
- Full length motor shaft
- Suction strainer
- Outlet sockets available in PP and CPVC

**Options**
- Suction extension pipe
- Hose connection

# **Vertical pumps** series D13-PP

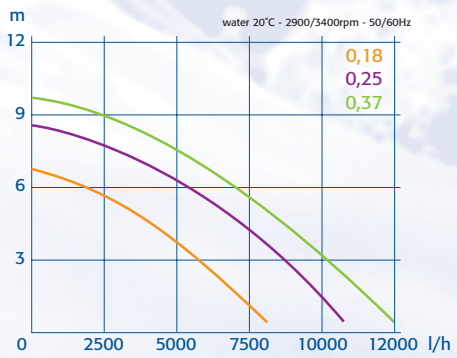


| Type | kW | HP | Out(d/DN) |
|---|---|---|---|
| D13-08-300-PP | 0,18* | 1/4* | 25/20 |
| D13-10-300-PP | 0,25* | 1/3* | 25/20 |
| D13-12-300-PP | 0,37* | 1/2* | 32/25 |

* *For 3-phase motors < 220V the indicated motor will be one size bigger.*

www.hendor.com

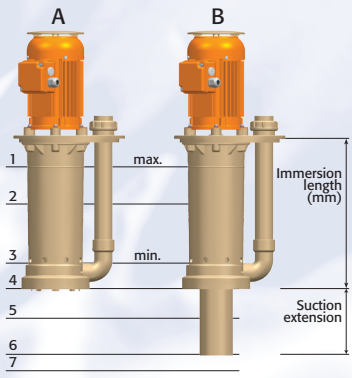


Info 2017738/R0 November 2017