

**New  
1450 rpm**

**40.000 - 180.000 l/h**

**Typical applications**

- Designed and developed for low life cycle cost in corrosive low pressure applications
- Scrubbing (fume and air)
- Waste water treatment
- Rinsing

**Features**

- Low energy consumption due to high hydraulic efficiency and IE3 class Premium Efficiency Motor
- Machined high grade Simona® AlphaPlus™ PP
- Elastomers EPDM
- Sealless pump, can run dry endlessly
- Round mounting plate for easy installation
- Including discharge pipe with GF union
- Impeller locked (no damage with wrong rotation direction)
- Oversized motor according to Hendor heavy duty specifications
- Stainless steel shaft and fasteners (no metal in contact with liquid)
- Motor 4 pole, IP55, Class F, S1 Duty and PTC-160
- Double layer 2C chemical resistant coating
- Hoisting eyes for easy lifting and transportation
- CE and usULc certified complying with IEC 60034 standards


**Options**

- GF union connection socket in PVC or CPVC
- Suction extension pipe
- Suction strainer
- FPM (Viton™) elastomers
- Vapour lock
- Foam rubber seal in mounting plate
- Flange discharge connection
- Customized mounting plate
- Customized color
- Extra anti-corrosion coating on motor
- Voltages outside standard range




D33-110/15-400-PP


**Vertical pumps series D33 - D35 - D39**

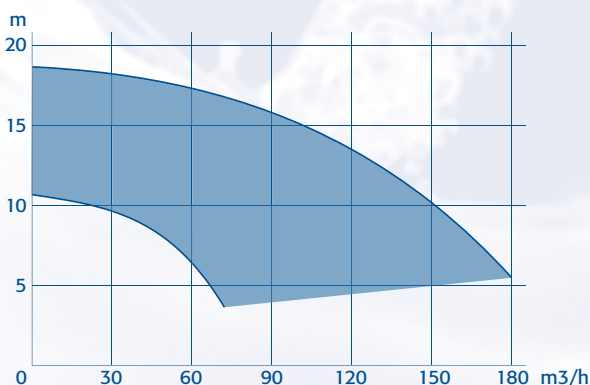



Type	Out (d/DN)
D33-90/14-400-PP	
D33-110/15-400-PP	90/75
D33-110/16-400-PP	
D35-130/14-400-PP	
D35-140/15-400-PP	110/90
D35-150/15-400-PP	
D39-180/17-400-PP	110/90

 [www.hendor.com](http://www.hendor.com)

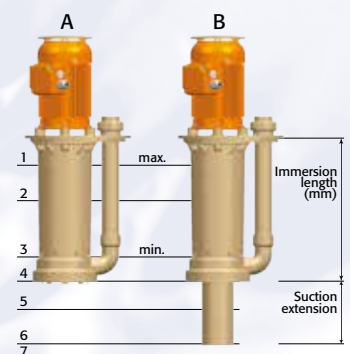

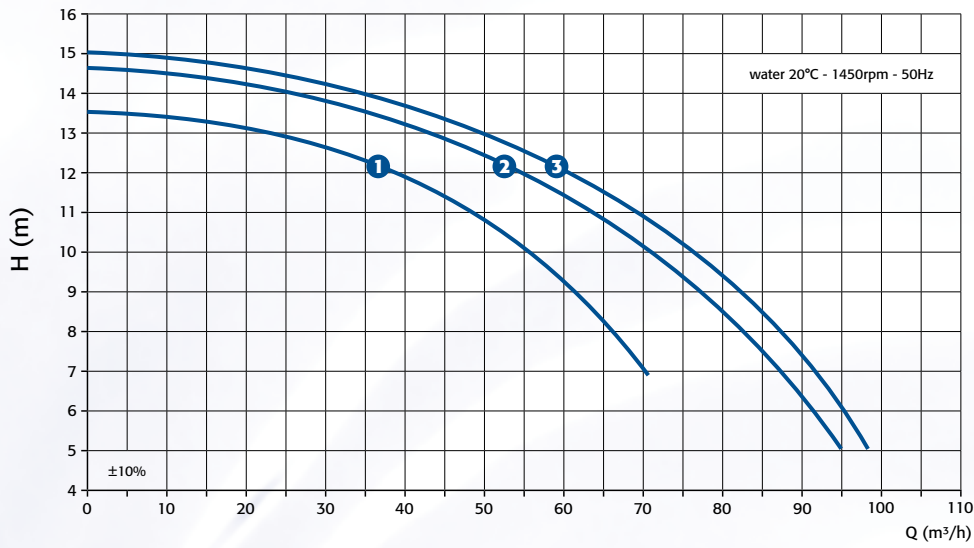

- 1 D33-90/14-400-PP
- 2 D33-110/15-400-PP
- 3 D33-110/16-400-PP

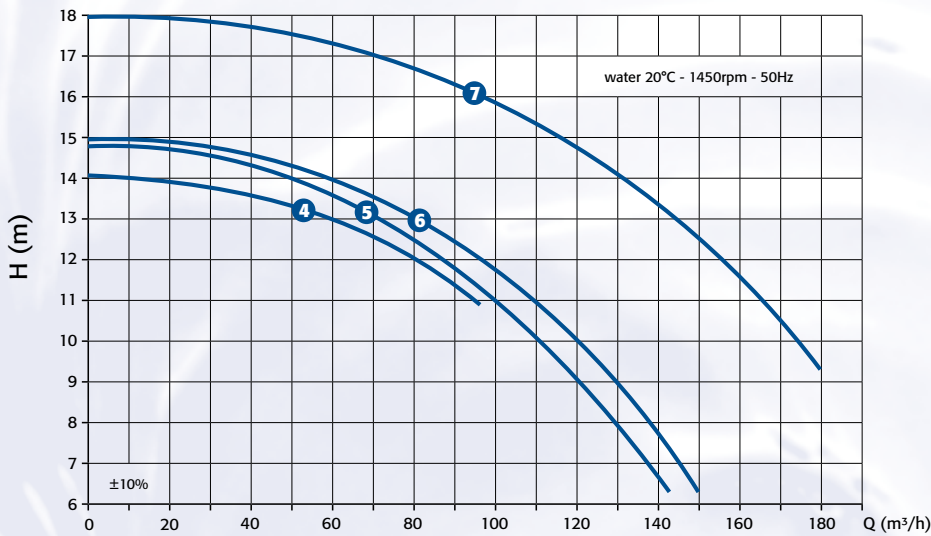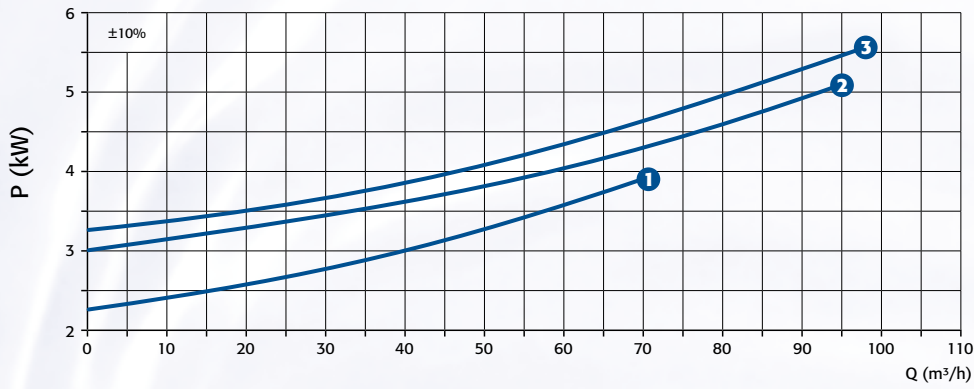

- 4 D35-130/14-400-PP
- 5 D35-140/15-400-PP
- 6 D35-150/15-400-PP
- 7 D39-180/17-400-PP

